


TECHNICAL DATA

# Fluke 362 Clamp Meter

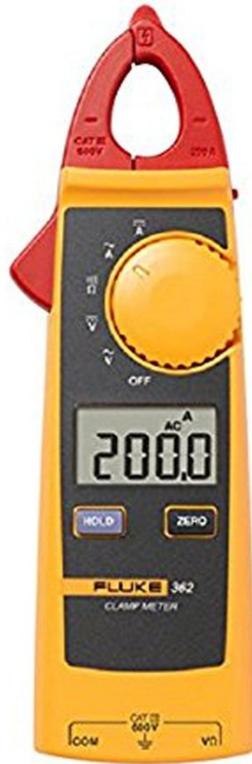

## Key features

- Thin, light, compact body design for one-hand operation
- 18mm triangular jaw allows for easy measurement on small cables
- Large, easy-to-read backlit display
- 200 A ac and dc current and 600 V ac and dc voltage measurement range
- 3000  $\Omega$  resistance range, continuity detection
- Zero function allows the display to be cleared for DC measurements
- Data Hold function
- CAT III 600 V safety rating

## Product overview: Fluke 362 Clamp Meter

Lightweight, thin and compact, the new 362 Fluke Clamp Meter is designed to fit easily in your pocket. The small 18 mm triangular jaw allows access into tight places where other clamp meters can't reach, while providing the accuracy you can trust from a Fluke tool. This durable clamp meter is a must-have for basic maintenance clamp measurements.

## Specifications: Fluke 362 Clamp Meter

Range	Resolution	Accuracy
-------	------------	----------

AC current	200A	0.1A	2% ± 5 digits (45-65Hz) 2.5% ± 5 digits (65-400Hz)
DC current	200A	0.1A	2% ± 5 digits
AC voltage	600 V	0.1 V	1.5% ± 5 digits (45-400Hz)
DC voltage	600 V	0.1 V	1% ± 5 digits
Resistance	300/3000Ω	0.1/1Ω	1% ± 5 digits
Continuity	<=70Ω		

### General Specifications

Size (LxWxH) mm	205 × 60 × 22
Clamp opening	18 mm
Weight	196 g
Safety rating	CAT III 600 V
Warranty	2 years



**Fluke.** *Keeping your world up and running.®*

**Fluke Corporation**  
PO Box 9090, Everett, WA 98206 U.S.A.

**For more information call:**  
In the U.S.A. (800) 443-5853  
In Canada (800) 36-FLUKE  
From other countries +1 (425) 446-5500  
[www.fluke.com](http://www.fluke.com)

©2025 Fluke Corporation.  
Specifications subject to change without notice.  
05/2025

**Modification of this document is not permitted  
without written permission from Fluke  
Corporation.**